
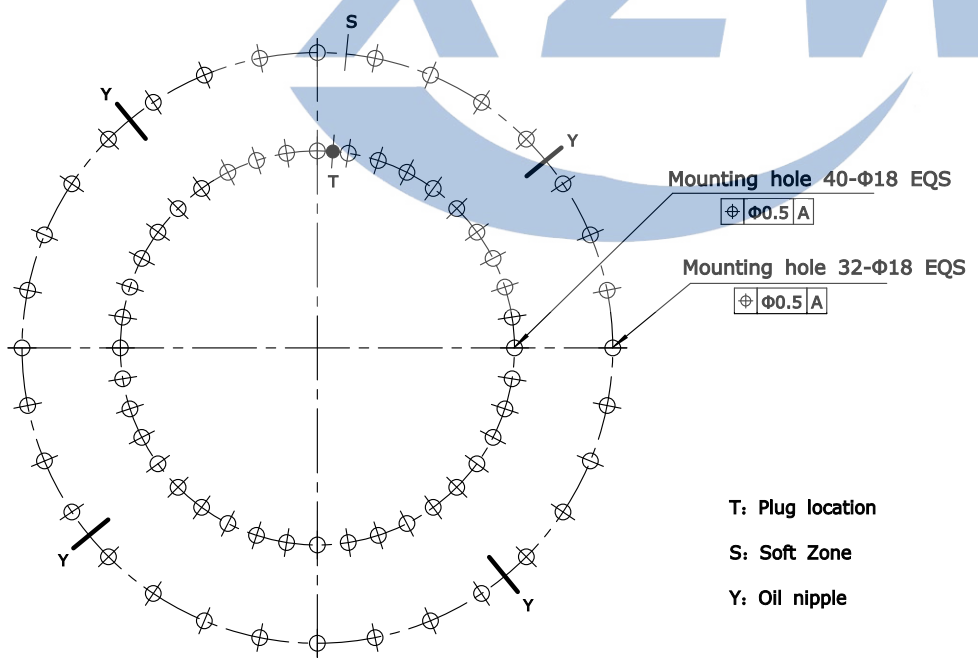



U.O.N  $\nabla$  6.3

Notes:

1. Unspecified chamfer:  $1.0 \times 45^\circ$   
Through hole chamfer:  $1.0 \times 45^\circ$   
Edges chamfer
2. Raceway of Inner & outer ring Induction hardened, hardness: 55~62HRC  
Depth:  $\geq 3.0$ mm
3. Inner & outer ring quenched & tempered, hardness: 207~262HB
4. Radial clearance: 0.15~0.45 mm  
Axial clearance: 0.15~0.45 mm

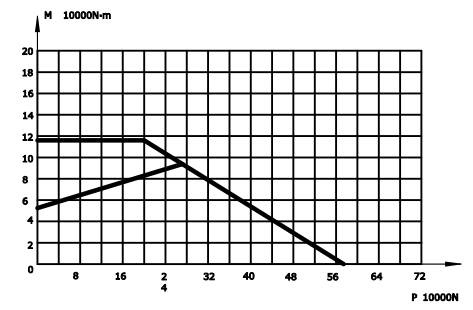

T: Plug location  
S: Soft Zone  
Y: Oil nipple

08	HG/T2811	Seals	NBRI-3	W17	2	
07	GB117-76	Pin	CN45	$\Phi 5 \times 45$	1	
06		Plug	CN45	$\Phi 25$	1	
05	JB/T7940.7	Oil nipple	Component	M8×1	4	
04	GB/T699	Inner ring	50Mn		1	
03	GB/T308-200	Ball	GCr15	19.844	122±1	
02	HG/T2349	Spacer	Nylon	D20	122±1	
01	GB/T699	Outer ring	50Mn		1	
No.	Standard	Component	Material	Model	Qty	Remark
			Model	WD-230.20.0944	Drawing	Weight 52.3kg
			Name	Slewing Bearing	Qty	Scale
			Material	50Mn	Total 1 page	the 1st page
Design	Standard					
Check						
Process	Approve					
Date						
<b>XUZHOU WANDA SLEWING BEARING CO.,LTD</b> 						
Tel: +86 516 83309366 Fax: +86 516 83915766 <a href="http://www.slew-bearing.com">http://www.slew-bearing.com</a>						